


PIN	OUT
1	Y1
2	X1
3	Y2
4	X2

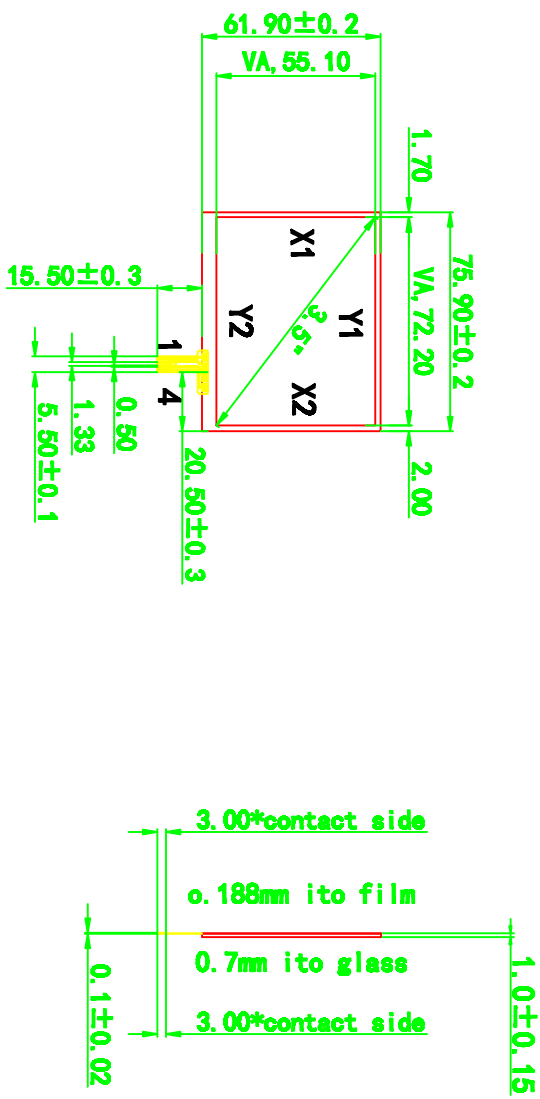

由 Autodesk 教育版产品制作

Notes:

1. Type: Film to Glass
2. Operating Voltage: $\leq 10V$
3. Operation Temperature: $-10^{\circ}C \sim 60^{\circ}C$
4. Life Time: $> 1,000,000$ times
5. Connect Material: FPC
6. Response Time: $\leq 10ms$
7. Linearity: $\leq 1.5\%$
8. Transmittance: $\geq 85\%$
9. Surface Hardness $\geq 3H$ (pencil)
10. Operation force: $60g \sim 150g$
11. Resistance: Y: $200\Omega \sim 1000\Omega$ X: $100\Omega \sim 600\Omega$

MODEL NO.	TP035W4L2	UNIT:	MM
DRAWN:		TOLERANCE:	± 0.3
DATE:	15/11/24	SCALE:	1:1
VERSION:	1.0	REV:	