
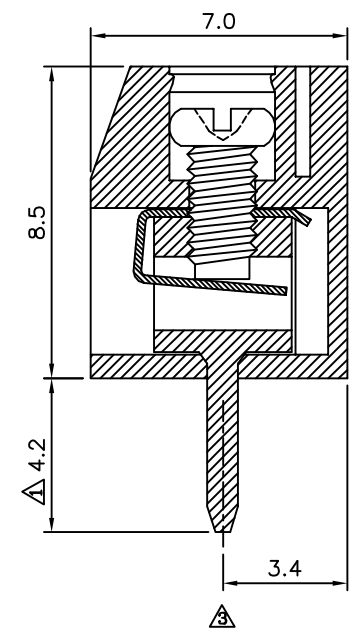


Recommended P.C.B. Layout

△△ SPECIFICATION

Current Rating: 10 Amp/Way Max.
 Voltage Rating: 150V AC
 Withstanding Voltage: 2000V AC/Minute
 Test Time=60 Sec/1 PCS
 Contact Resistance: 20 Milliohms Max.
 Wire Range: 16~30 AWG
 Torque: 2kgf.cm/M2
 Operating Temperature: -40°C~+105°C
 Soldering Reliability: Test Temperature=250°C±10°C
 5 Seconds Max.
 Contact(Metal Housing): Copper Alloy
 Terminal Screw: Steel, Galvanized And With Cr3+ Plated
 Wire Guard: Stainless Steel
 Surface Of Solder Tails: Tin Plated
 Insulator Body(Housing): Polyamide(UL94V-0), Blue
 RoHS Compliant

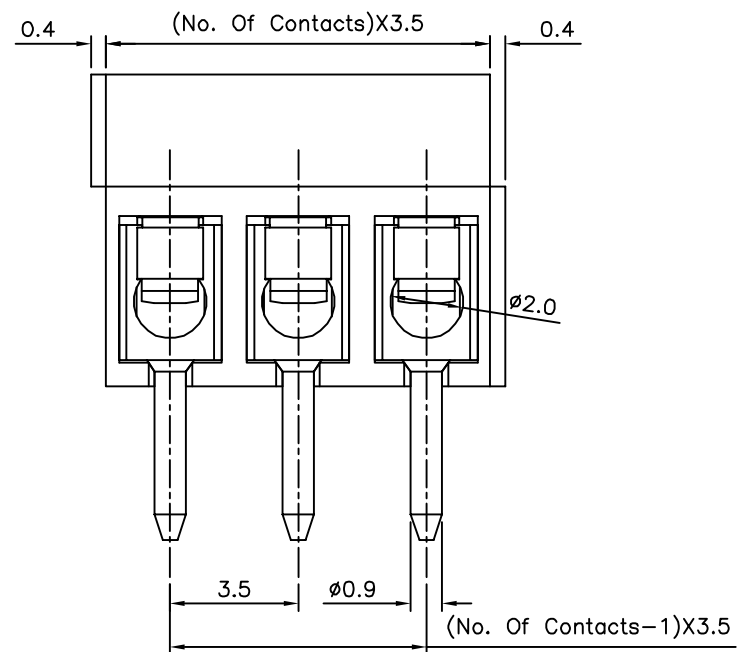

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°	UNIT mm
19963		EMILY			
		CHECKED BY HZF			
		DRAWING BY WSS			
SCALE	NONE	REV.	A4		

△ A4	Modify Data	HZF	12/27/2011
△ A3	Modify Data	HZF	11/21/2011
△ A2	Modify Data	HZF	10/12/2011
△ A1	Modify Dim.:3.8-->4.2	HZF	09/29/2010
△ A0	NEW RELEASE	HZF	03/07/2010
NO. REV.	REVISIONS	CHK	DATE